

PRODUCT DATASHEET

K11793 – 3 SPEED DOMESTIC CIRCULATING PUMP – 25/6-130



Description

The KeyPlumb 3 Speed Domestic Circulating Pump 25/6-130 is a 3 Speed Manual Domestic Heating Circulator with a standard 1 ½" threaded connection. With a port-to-port distance of 130mm and a maximum head of 6m, it's the perfect replacement for existing circulators in domestic heating systems.

This pump can deliver powerful performance for a range of domestic heating applications. Its three adjustable speed settings allow you to easily customise the flow rate to meet your specific needs, whether you require maximum heating power or energy efficiency. Compatible with most types of heating systems, including hot water circulation, radiator heating, and underfloor heating, our 3 Speed Domestic Circulating Pump is a versatile solution for all your domestic heating needs. And with its quiet operation, you won't be disturbed by any noise while it's in use.

Made from high-quality materials, this pump is built to last and designed to provide years of trouble-free operation. Its compact size and easy-to-install design make it a convenient choice for homeowners and professionals alike.

With a 2-year manufacturer's guarantee, you can be confident in the quality and durability of our product.

Product Information

SUITABLE FLUIDS

Heating water to VD12035

Heating water

Water/glycol mixtures max. mixing ratio 1 :1

PERFORMANCE

Fluid temperature range -10°C - +180°C

Max. working pressure: 10bar.

AMBIENT TEMPERATURE

Permissible up to 50°C

POWER

Mains power 1~230v,50Hz

MOTOR

Degree of protection IP44

Insulation class H

CONSTRUCTION MATERIALS

Pump body: cast iron.

Impeller: PEI.

Shaft: ceramic.

Bearings: ceramic.

MOUNTING POSITIONS


Pump shaft in the horizontal plane

PUMP EQUIPMENT


Screwed end single head pump Manual 3-speed control

Non-overloading single phase motor


Components

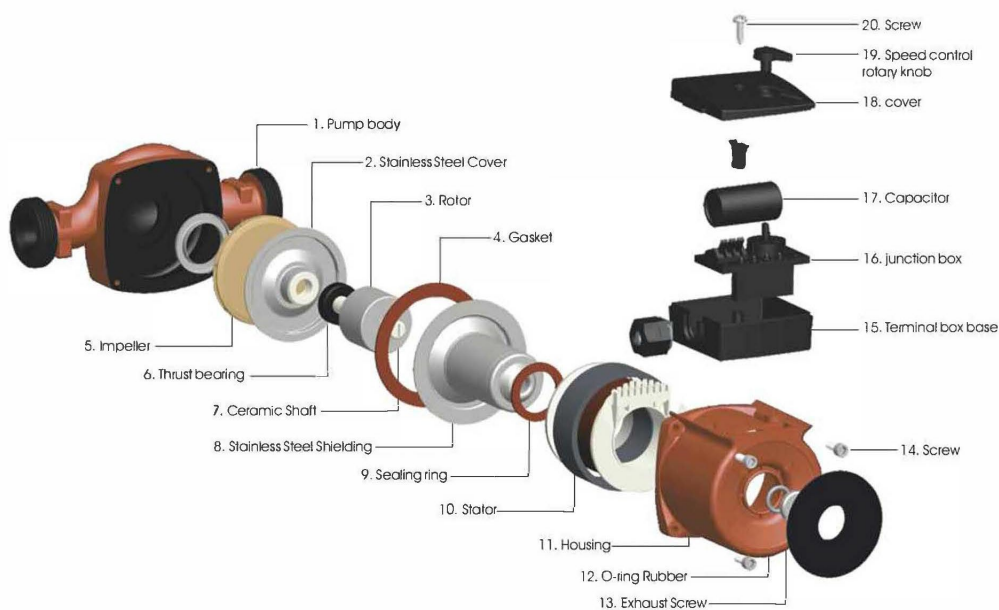

Overall Dimension

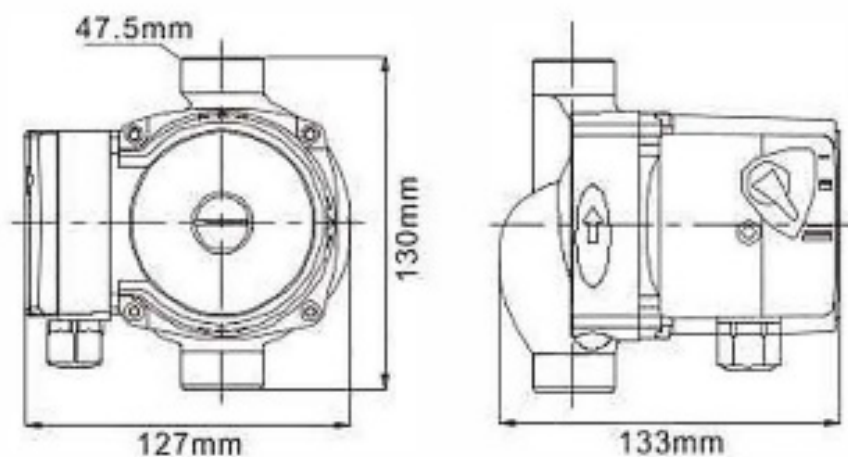

Performance Curve

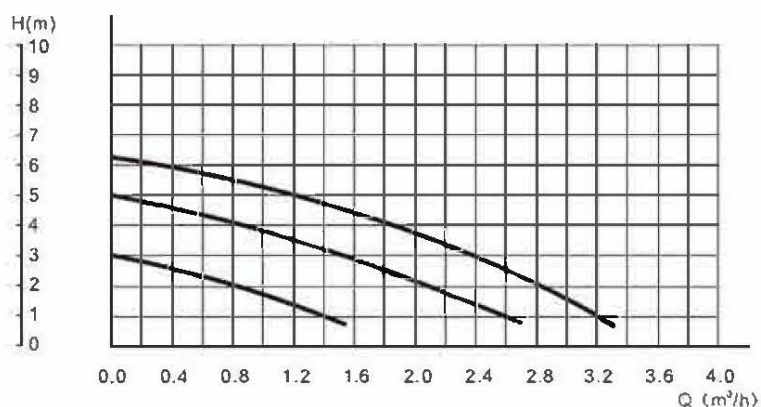

Technical Parameter

Model	Rated Power (W)	V/Hz	Highest Head (m)	Max. Capacity (L/min)	Input&Outlet Dia. (mm)	N.W (kg)	G.W (kg)	Q'ty (PCS)	Package Dimension (cm)	20'
ZL-3001-25 / 6-130	93/67/48	220V/50	6/5/3	50/40/25	1 1/2"	2.4	21	8	34.5*30*29.5	6800

